

LG PALACE


Excellent anti-indentation with extra hard surface.
 High dimensional stability with glass fiber layer.
 Quick and easy installation. Elegant & realistic patterns.

The most valuable choice

LG Palace has the highest quality and practicality realized by LG Chem's best scientists and technicians.

LG Palace satisfies the dignity, practicality, and various interior designs.

Structure

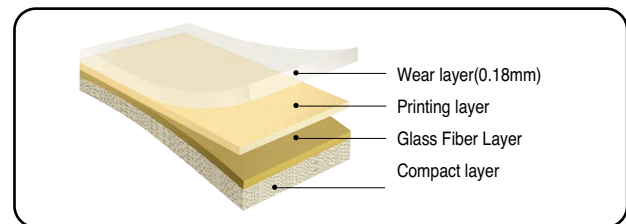

Specifications

Thickness 1.5mm
Width 2M
Standard Packing ... App 20 ~ 25mtrs per roll to be wrapped with woven cloth
Min Q'ty per Color ... 1,600 m²
Min Qrder Q'ty 8,000 m² per 20ft CNTR
Shipment Within 30days after your order

Advantages

1. Excellent anti-indentation with extra hard surface
2. Patterns match up perfectly backed with "glass fiber" to prevent stretching
3. Easy to maintain and install
4. Various surface effects with 3 different embossments such as E0, E33

Applications

Ideally suited for
 Domestic Areas such as bedroom, kitchen, corridor, bathroom.
 Light Commercial Areas such as offices and shop

Design

Wood - 22 colors
 Ceramic - 10 colors
 Marble - 9 colors
 All over - 13
 Total - 54 colors

Technical Data / Test Results

Item	Unit (Direction)	Standard Value	Test Method
Dimensional Stability	%(L) %(W)	Not more than ±0.15	ASTM D 1204 EN 651
Indentation	mm	Not less than 0.3	ASTM F387 EN 429
Indentation on Residual	%	Not more than 2.5	ASTM F387 EN 429
Abrasion Quantity	g	Not more than 0.2	ASTM D 3884 53863

Adhesives

Item	Ingredient	Application
For general use	Viny Acetate emulsion adhesive or Acrylate emulsion adhesive	used to adhere cement mortar floors

Seam sealer

Item	Ingredient	Application
For Caleo Palace	Ployurethane seam sealer	used to seal seams Where section join