




>> TECHNICAL DATA SHEET

COMBISTAR

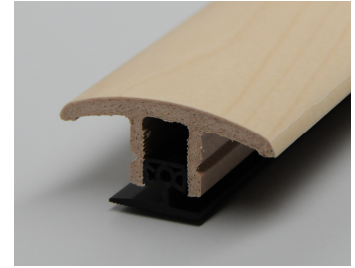

Trade name	Combistar
General description	Ground transition and adjustment profile for floor heights of 7-20mm.
Supporting material	WPC (Wood Plastic Composite) 80% wood, 20% PP and additives
Wrapping material	<ul style="list-style-type: none">• Real wood veneer• Decorativ foil with melamine
Bonding	PO
Surface	<ul style="list-style-type: none">• UV-transparent varnish additive with corundum• Melamine
Abrasion resistance	300 ¹ / _{min} to EN 14354
Slip resistance	DS to EN14041
Tolerances	PEDROSS NI3001
Formaldehyd emission	Within the legal requirements
Moisture content at delivery	< 10%
Resistance to fungal and insect attack	Very good
Packaging	<ul style="list-style-type: none">• Coated cover profile• Basic rail (PVC)• Terminal parts (PVC)• Screws DIN 7997 3,5x30, Dowel S6 packed in a tube• Manual
Instructions, Maintenance	<ul style="list-style-type: none">• Keep cool and dry• Extensive exposure to water on the surface can cause permanent damage to the surface
Cleaning	<ul style="list-style-type: none">• Using a vacuum cleaner• With detergent pH <8 and a damp cloth• Avoid heavy accumulations of water
Disposal	Recycle environmentally after use

